


Acoustic Glasswall 5000G




Acoustic operable glasswall maintains the aesthetic appeal of glass while providing acoustic separation to STC 44. Acoustic operable glasswalls are available as single and paired panels only. They consist of glass surrounded with an aluminum frame that is nominal 83mm thick. Each panel has a 25mm clearance bottom retractable seal that exerts downward force. The standard aluminum frame finish is clear anodized but it may also be ordered powder coated or custom anodized.

5000G Double Glazed Panel

Vertical Section

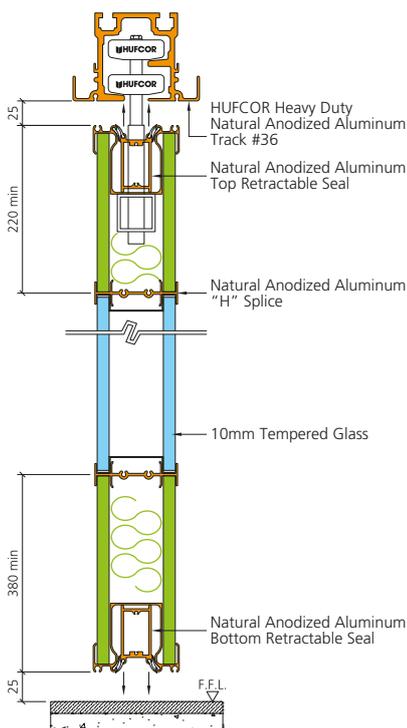

Horizontal Sections

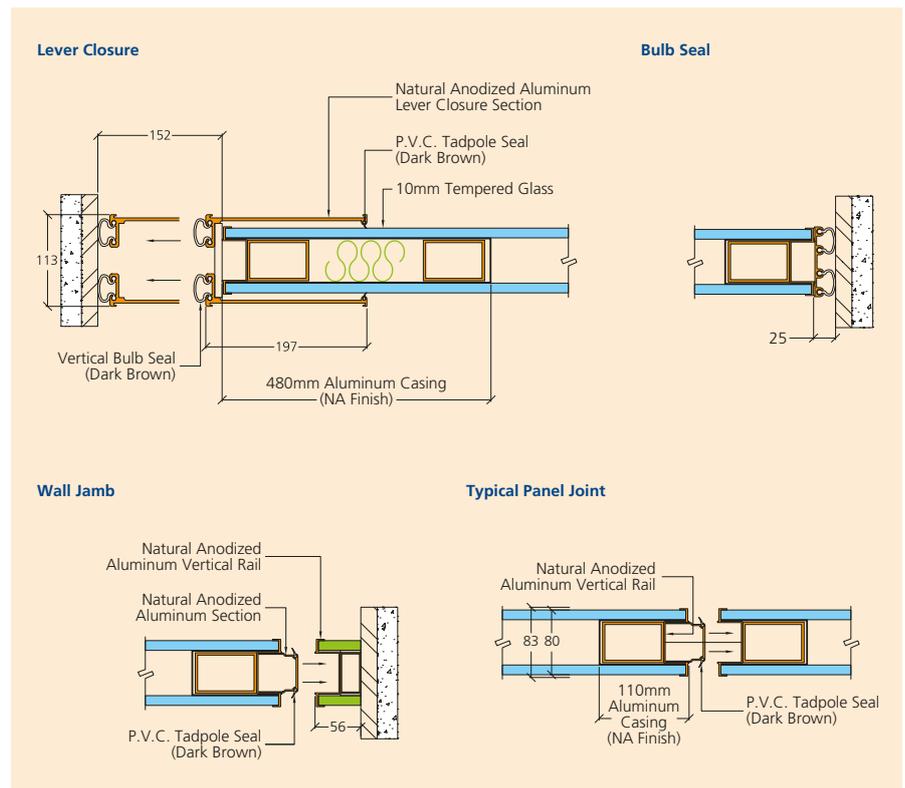

Frameless Glasswall GL1




Frameless Glasswall GL1 consists of 12mm tempered glass panels mechanically fastened to standard 100mm horizontal top and bottom aluminum rails. The rails are of clear anodized aluminum (Architectural-grade aluminum alloy 6063-T6, silver white). The glass has polished edges while vertical trim is an available option. Frameless Glasswall GL1 is the single glass omni-directional operable partitions, which brings daylight into indoor space creating a bright and spacious environment. It is also an eco-friendly solution to save lighting power and cost. Optional in-line pass doors are available on omni-directional models. Panels are shipped fully assembled.

Note:

There will be a gap of 5mm between the glass panels when they are in place to prevent glass-to-glass contact. The gap may vary due to glass industry tolerances.

GL1 Individual Panel

Vertical Section

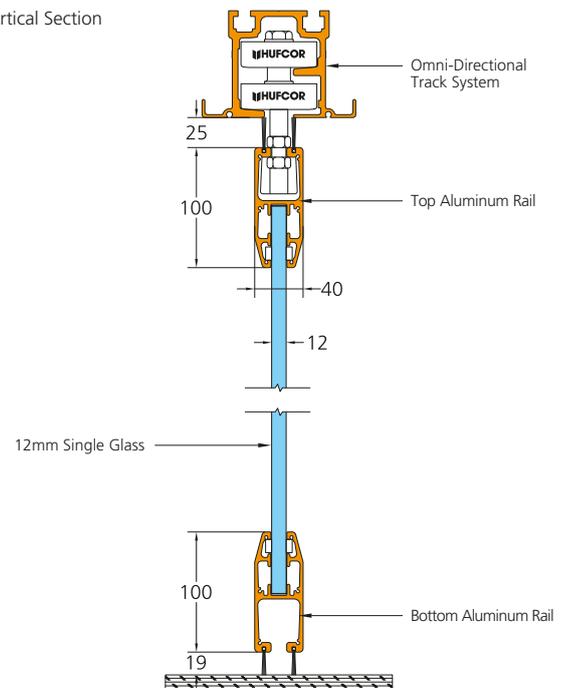

Get more with HUF COR | www.hufcor.com.my



Design & Technology Developed by HUF COR in the USA



HUF COR Malaysia

No.10, Jalan TIAJ 2/7, Taman Industri Alam Jaya,
42300 Bandar Puncak Alam, Selangor D.E. Malaysia
T: (603) 6038 3833 F: (603) 6038 3555 E: hufcor@hufcor.com.my

HUF COR Singapore

10 Ubi Crescent, #02-27, Ubi TechPark, Singapore 408564
T: (65) 6742 9062 F: (65) 6844 4710
E: hufcor@hufcor.com.sg

